


**Lumotronic**<sup>®</sup>  
LED LIGHTING & ELECTRONIC COMPONENTS




OFFICE  
LINEAR LIGHT

# SEAMLESS SERIES

PERFORMANCE OFFICE LIGHTING

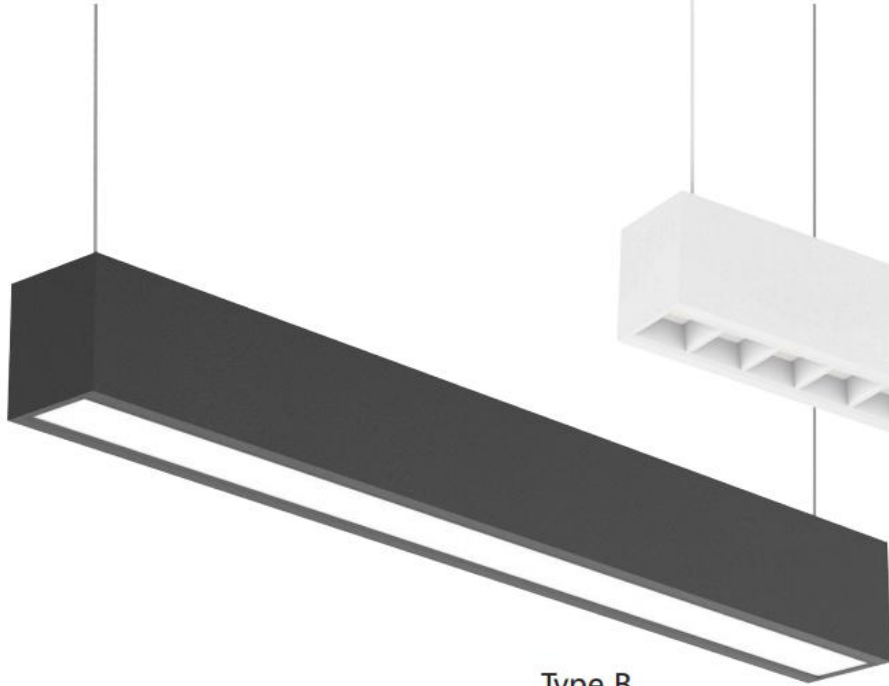

Type B

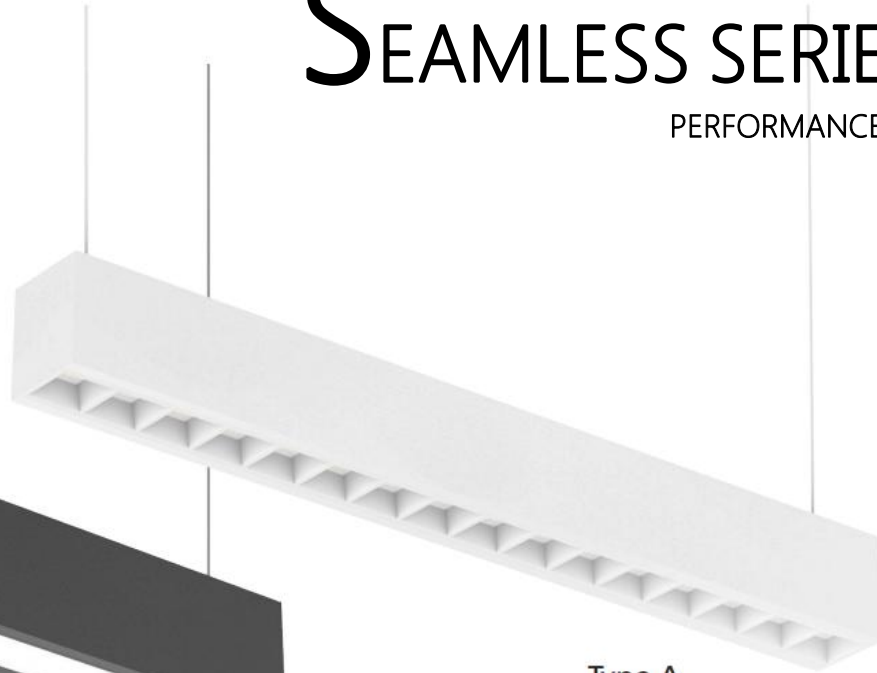

Type A




# FEATURES

1. Type A - Louver reflector design Super energy saving 120-130lm/w
2. Type B - Opal diffuser 110-120lm/w
- 3, 2 types can be changed flexibly, share the same fixture. By replacing the type A modular with type B, no need tools.
- 4, Seamless splicing
- 5, 3CCT in 1 lamp, saving your stock space
- 6, Finish color: white, black, grey

Type	Size	Wattage	Lumen	Beam angle	LED	CCT	Voltage
TYPE A	604*70*60mm	20W	2400-2500LM	100	2835SMD CRI80 Bridgelux	3000K 4000K 5000K 5700K	200-240V AC
	1204*70*60mm	40W	4800-5200LM	100			
TYPE B	604*70*60mm	20W	2200-2400LM	100	2835SMD CRI80		
	1204*70*60mm	40W	4000-4800LM	100			

U  
LTRA SLIM

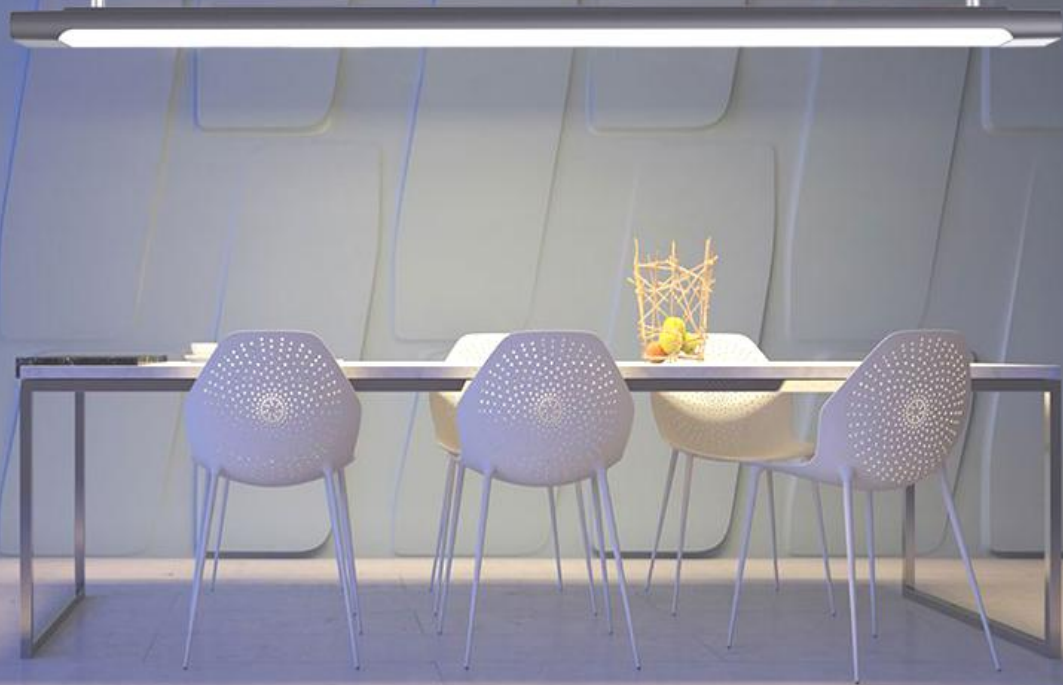



# FEATURES

1. Elegant design: ultra slim--3mm thickness, with curve eadge
- 2, Uniform light output, make this light sutiable for high-end office lighting
- 3, A B C 3 versions, flexible combine to suspension, surface mounting and linkable version
- 4, Finish color: black, white, grey

Size	Wattage	Lumen	Voltage
600*90*30mm	20W	1980-2200lm	200-240V AC
900*90*30mm	30W	2940-3330lm	
1200*90*30mm	40W	4120-4600lm	

## TYPE A : SUSPENSION KIT

External driver; suspension wire is DC cable; available with linkable and non-linkable




## TYPE B : SUSPENSION / CEILING MOUNTING

Built-in driver, use different accessories to have different installation ways, non-linkable

## TYPE C: LINKABLE

Built-in driver, available with suspension and ceiling mounted installation



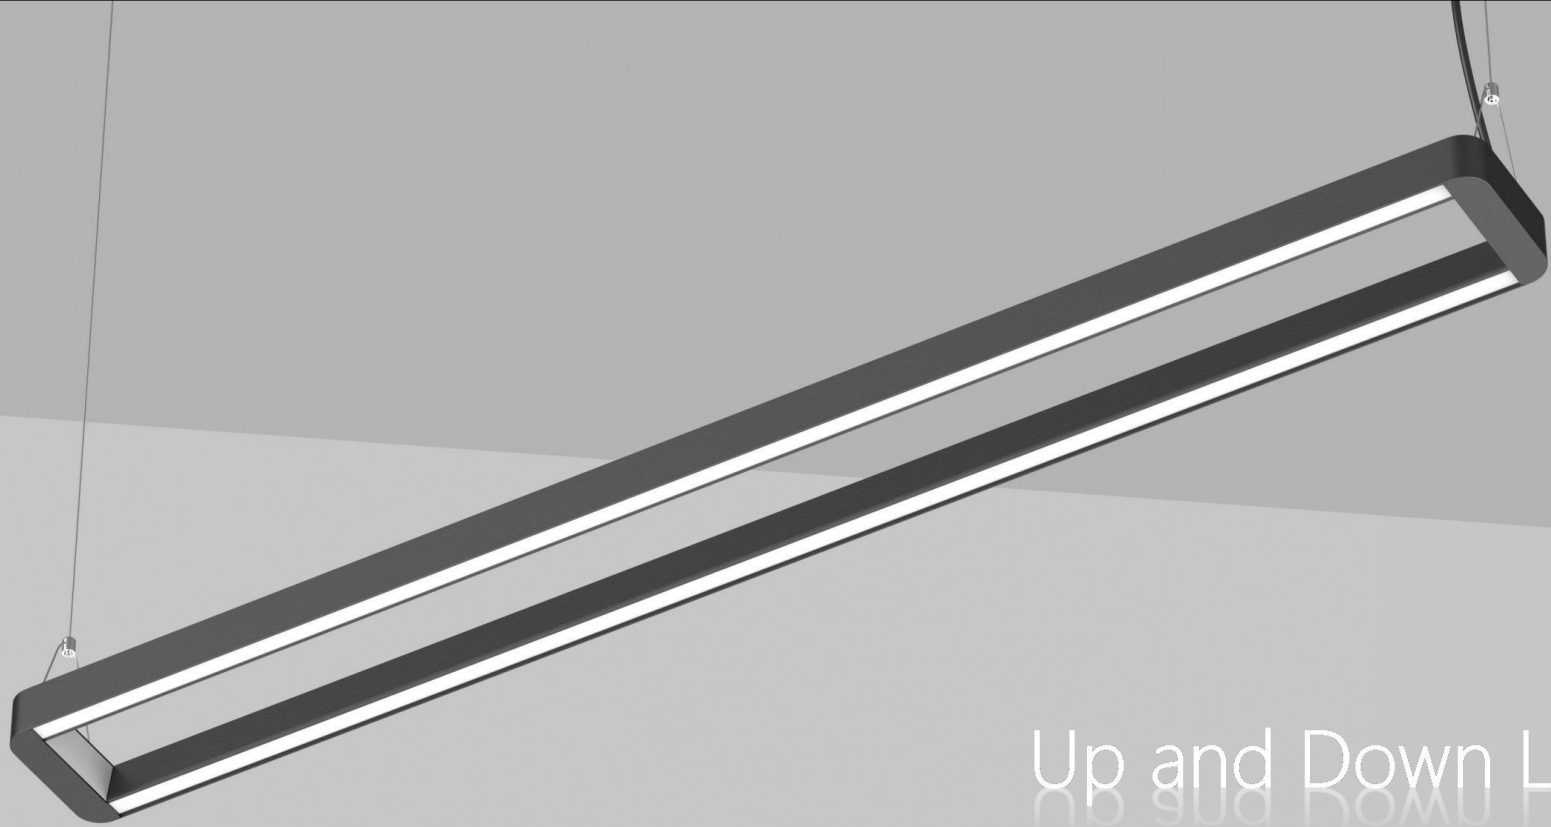

# Up and Down Lighting


UGR<19,

120-130lm/w, 1.2M -30W, 1.5M-40W




## T YPE A

UGR<19, 60° beam angle  
120-130lm/w, Louver reflector design

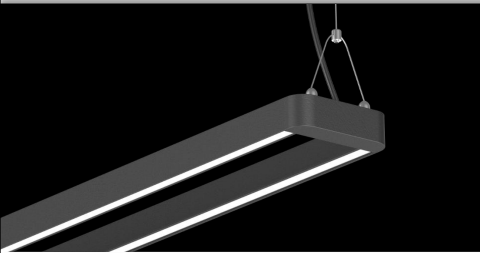

## T YPE B

100lm/w, 110° beam angle  
Milky white diffuser

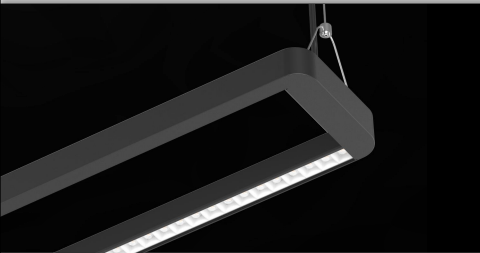


## T YPE C

Up and down lighting, UGR<19  
Louver reflector design





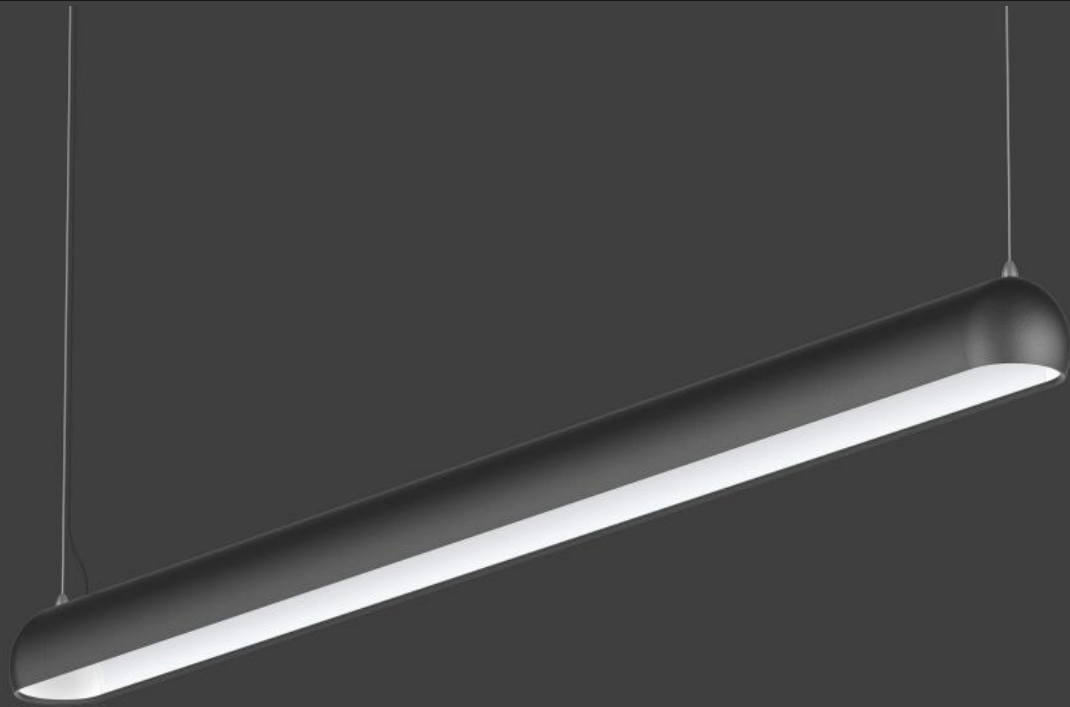

Up and Down Lighting UGR<19  
Up and Down Lighting UGR<19


<p>Up 110° Down 60°</p>	<p>Up 30% Down 70%</p>	<b>PF 0.9</b>	<b>CRI ≥80</b>	<p><b>HOURS</b> <b>50000</b></p>
-----------------------------	----------------------------	---------------	----------------	--------------------------------------



## FEATURES:

- 1, UGR<19.
- 2, Up and Down lighting.
- 3, 100~120lm/w high luminous flux.
- 4, Aluminum housing ensure excellent heat dissipation.
- 5, Flicker free driver solution.


Size	Wattage	Lumen	Beam angle	CCT	LED	Voltage	Finish Color
1206*81*61mm	40W	4000~4800lm	Up 110° Down 60°	3000K	2835SM D CRI80	230V AC	white / black
1652*81*61mm	60W	6000~7200lm		4000K 5000K 5700K			

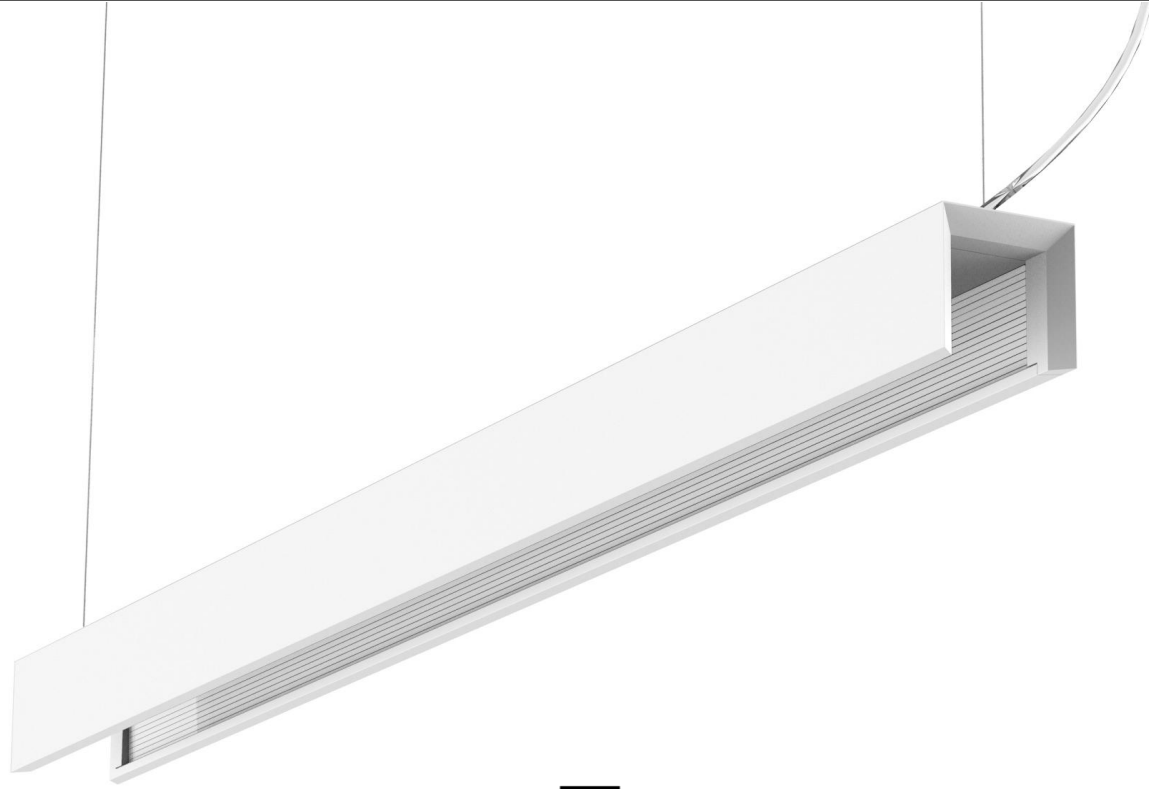

# INDIRECT

Up and Down

Lighting Seamless Linkable

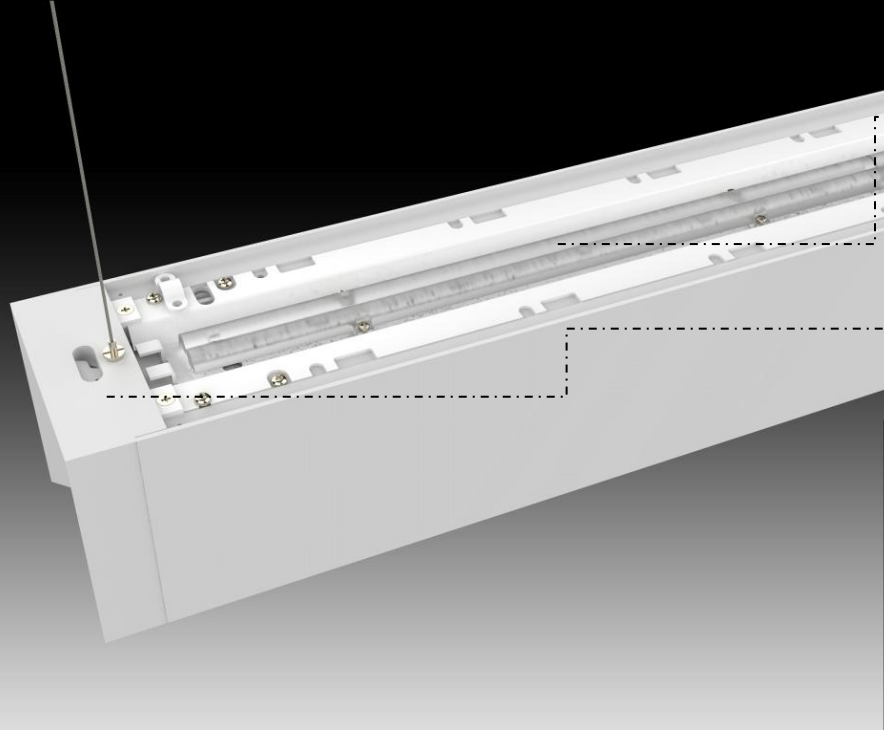


LEDs for upward light, with PC lens

Aluminum endcap, can be removed for connecting further light

white finished, with diffuse reflection

PMMA Light guide plate

LEDs

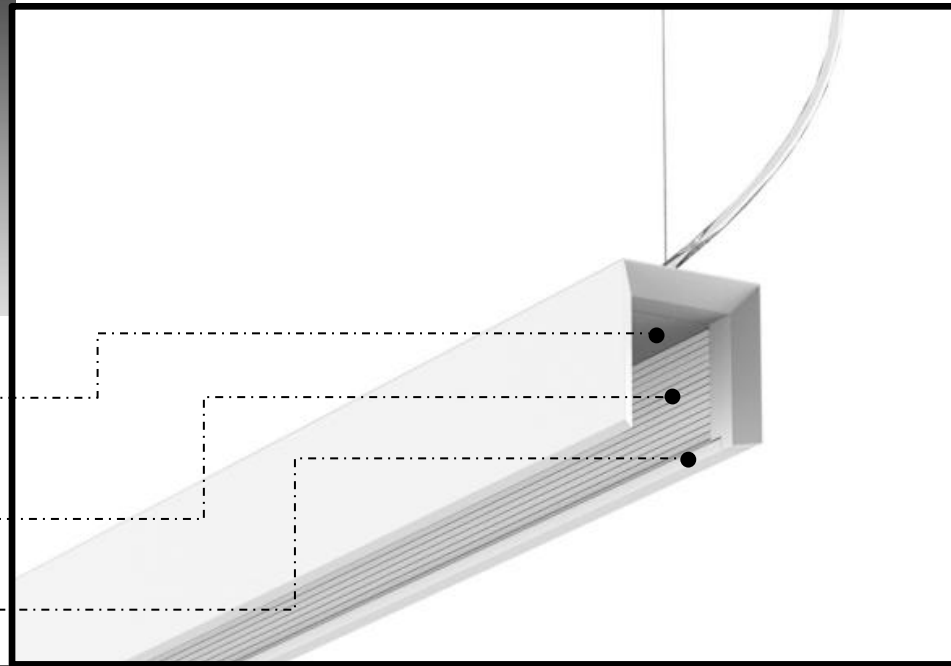




## FEATURES:

- 1, Unique and fashion design
- 2, High end optical design, with upward ambient lighting
- 3, Energy saving: 100lm/w
- 4, Seamless Linkable
- 5, Dimming options: 0-10V, triac dim.

Size	Wattage	Lumen	Beam angle	Voltage	Finish Color
1263*83*85mm	38W	2880-3000lm	90°	100-277V AC 0-10V dimming	Sand grey

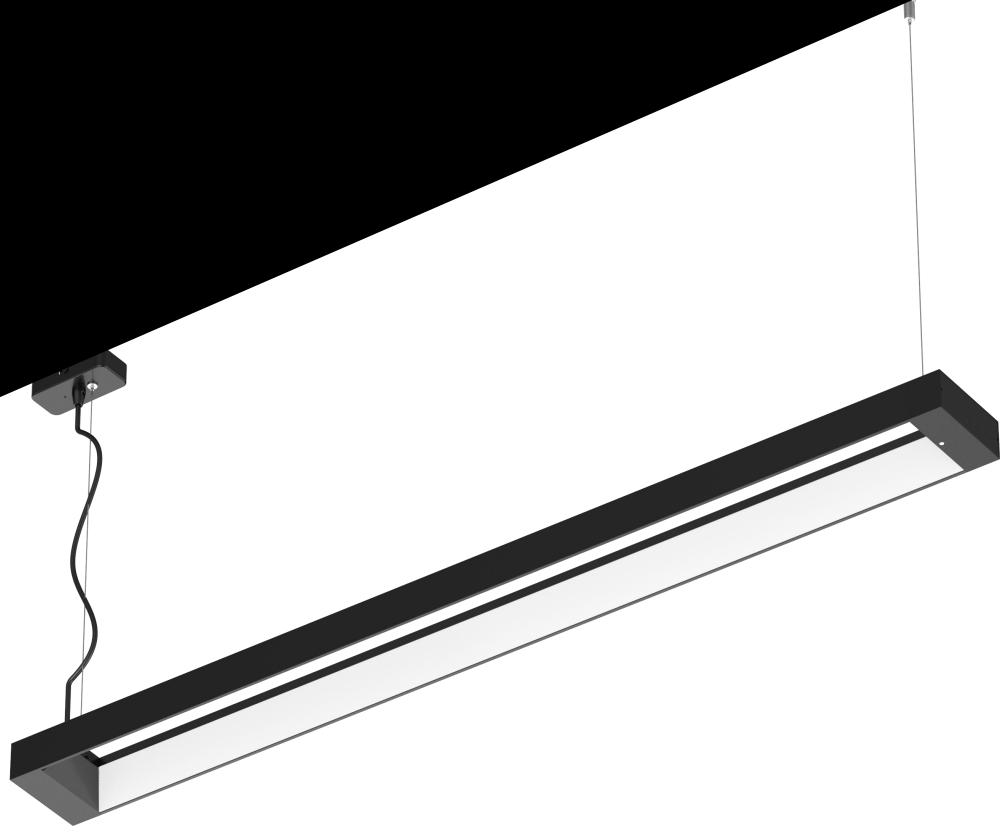

OFFICE LIGHT

---

---

# FEATURES:

- 1, Unique and stylish hollow design
- 2, 3 CCT changeable
- 3, Flicker free driver, triac dim available
- 4, Daylight sensor + Microwave sensor

Size	Wattage	Lumen	Beam angle	Voltage	Finish Color
1263*83*85mm	38W	2880-3000lm	90°	100-277V AC 0-10V dimming	Sand grey

